


# DATA SHEET

EL 315 D2 01 | 112759

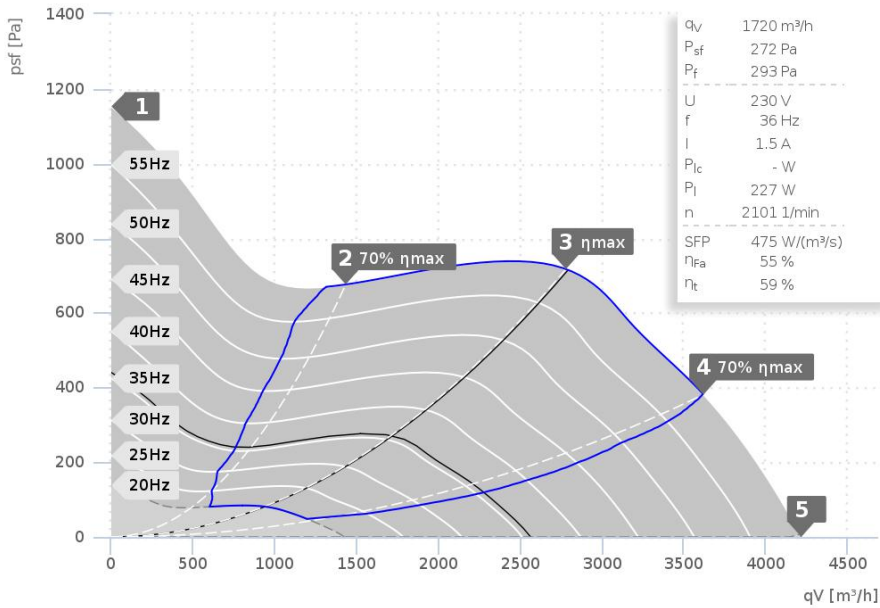

- **Attention! See note at FU-operation**
- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	2,4	2,0	2,8	2,7	2,4
Power consumption P <sub>1</sub>	W	783	628	908	893	780
RPM n	1/min	3443	3489	3421	3438	3465
SPL inlet L <sub>WA5</sub>	dB(A)	90	84	79	81	86
SPL outlet L <sub>WA6</sub>	dB(A)	94	90	87	89	92
SPL casing break out L <sub>WA2</sub>	dB(A)	75	73	70	72	75

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	69	-	40	57	60	64	63	64	57
Outlet	L <sub>WA6</sub>	76	-	46	68	69	71	68	64	56
Casing	L <sub>WA2</sub>	60	-	47	56	51	53	48	50	39

EL 315 D2 01   112759	
Voltage U <sub>N</sub>	230 V 3~
Current I <sub>max</sub>	3,0 A
Ambient Temperature t <sub>A</sub>	40 °C
Medium temperatures t <sub>M</sub>	40 °C
Speed Control	f
Motor Protection	TAO
Isolation Class	F
Weight	15,5 kg

