


DATA SHEET

EL 355 D2 01 | 112760

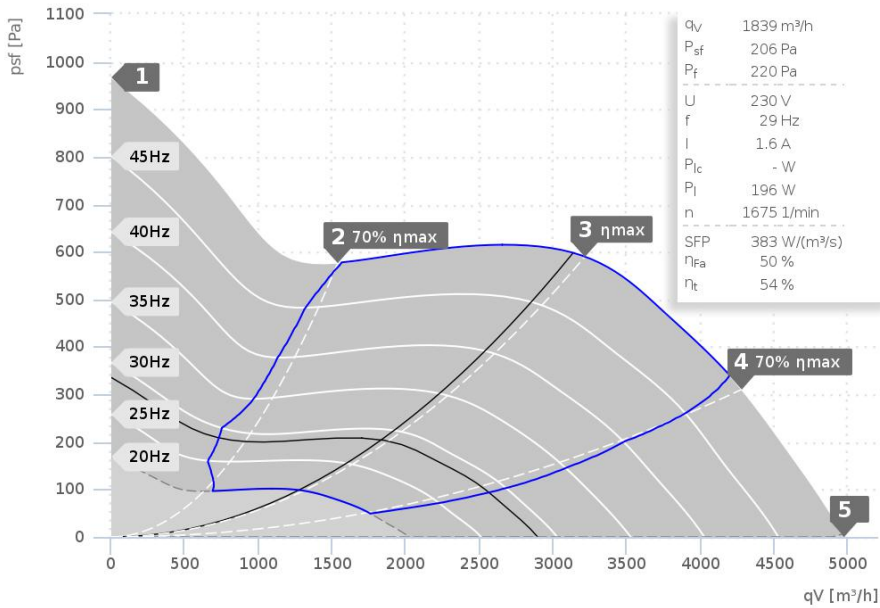

- **Attention! See note at FU-operation**
- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	2,6	2,2	3,0	3,0	2,7
Power consumption P ₁	W	785	610	907	903	795
RPM n	1/min	2871	2914	2857	2864	2887
SPL inlet L _{WA5}	dB(A)	90	86	80	82	86
SPL outlet L _{WA6}	dB(A)	95	90	85	87	91
SPL casing break out L _{WA2}	dB(A)	75	72	67	70	72

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	69	-	42	59	62	64	63	58	49
Outlet	L _{WA6}	73	-	47	61	68	69	65	62	52
Casing	L _{WA2}	57	-	44	47	52	52	49	46	40

EL 355 D2 01 112760	
Voltage U _N	230 V 3~
Current I _{max}	3,2 A
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	f
Motor Protection	TAO
Isolation Class	F
Weight	17,5 kg

