


DATA SHEET

EL 400 D2 01 | 119677

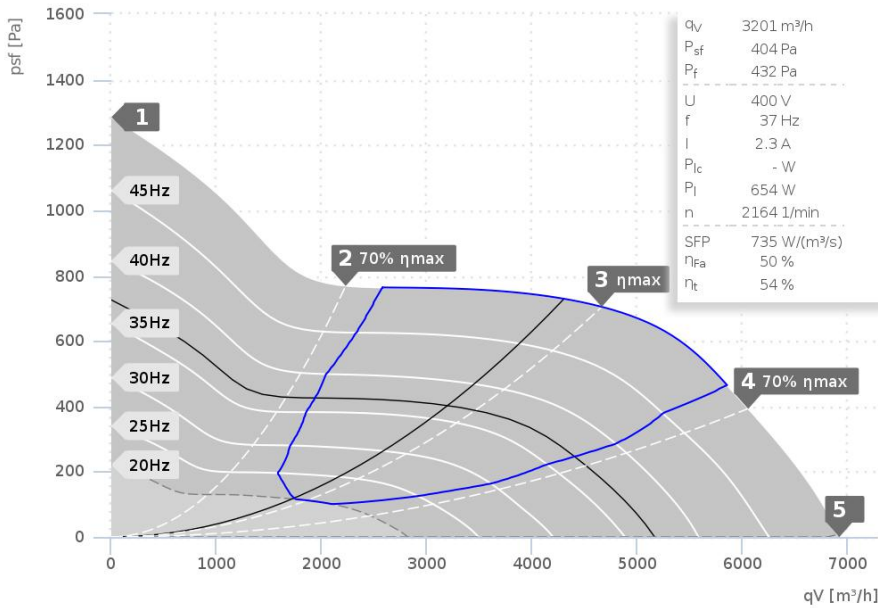

- **Attention! See note at FU-operation**
- Diagonal impeller with stator
- Casing of aluminium
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket
- Single step mains operation possible 400V/50Hz

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	2,8	2,5	2,9	3,0	2,8
Power consumption P ₁	W	1357	1128	1500	1542	1384
RPM n	1/min	2890	2927	2899	2899	2915
SPL inlet L _{WA5}	dB(A)	94	91	87	89	91
SPL outlet L _{WA6}	dB(A)	99	96	93	94	95
SPL casing break out L _{WA2}	dB(A)	86	83	82	83	84

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	80	-	60	70	73	74	75	69	60
Outlet	L _{WA6}	86	-	64	74	83	82	78	73	64
Casing	L _{WA2}	72	-	54	58	68	68	62	60	49

EL 400 D2 01 119677	
Voltage U _N	400 V 3~
Current I _{max}	3,2 A
Ambient Temperature t _A	80 °C
Medium temperatures t _M	80 °C
Speed Control	f
Motor Protection	TAO
Isolation Class	F
Weight	20,3 kg

