


DATA SHEET

DHA 220 E2 01 | 123012

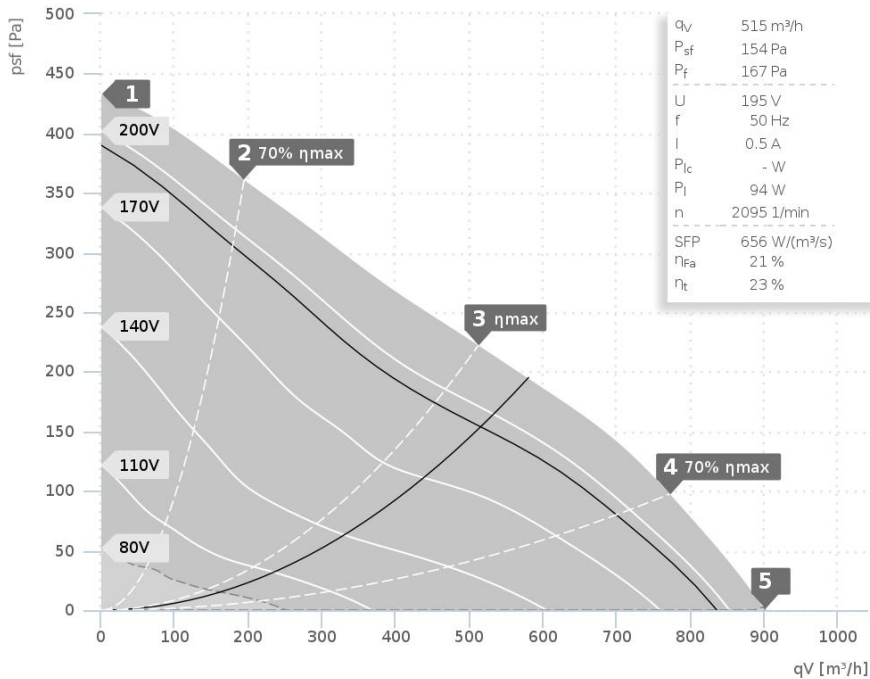

- Backward curved centrifugal fan
- Weather resistant plastic ASA, RAL 7012
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

Operating Point		1	2	3	4	5
Current I	A	0,4	0,4	0,5	0,5	0,4
Power consumption P_1	W	90	100	112	104	96
RPM n	1/min	2630	2524	2385	2485	2575
SPL inlet L_{WA5}	dB(A)	73	72	71	70	71
SPL outlet L_{WA6}	dB(A)	79	78	77	76	77
SPL casing break out L_{WA2}	dB(A)	-	-	-	-	-

Sound power (L_W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L_{WA5}	68	32	45	55	58	64	63	58	49
Outlet	L_{WA6}	74	67	44	56	64	70	69	60	51
Casing	L_{WA2}	-	-	-	-	-	-	-	-	-

DHA 220 E2 01 123012	
Voltage U_N	230 V 1~
Current I_{max}	0,5 A
Ambient temperature t_A	45 °C
Medium temperatures t_M	45 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	5,0 kg

