


DATA SHEET

EL 160L E2 01 | 125327

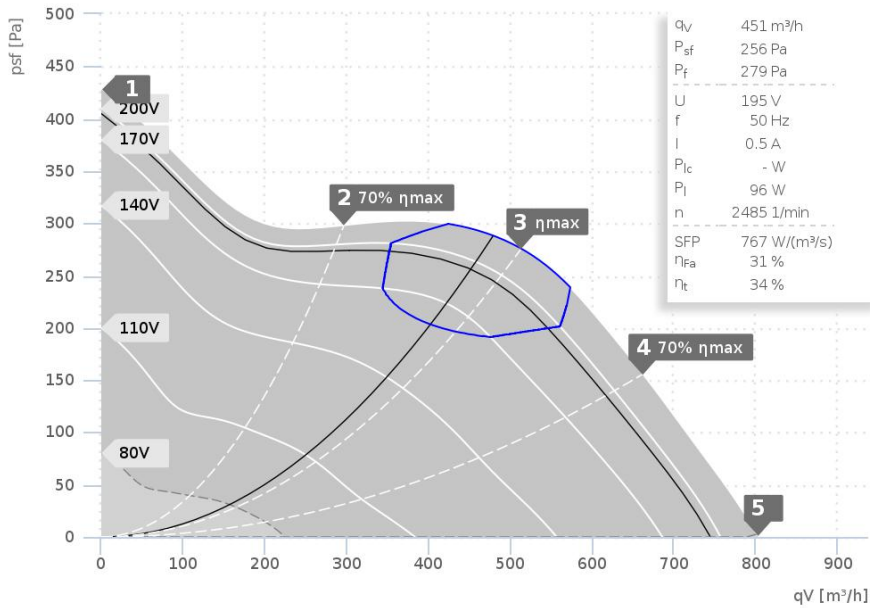

- Diagonal impeller with stator
- With Plastic housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,6	0,6	0,6
Power consumption P ₁	W	96	107	119	124	123
RPM n	1/min	2776	2706	2635	2613	2632
SPL inlet L _{WA5}	dB(A)	70	70	69	70	73
SPL outlet L _{WA6}	dB(A)	74	72	71	71	73
SPL casing break out L _{WA2}	dB(A)	65	63	62	63	65

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	67	28	41	50	60	63	62	58	49
Outlet	L _{WA6}	69	30	43	53	62	66	63	58	50
Casing	L _{WA2}	60	42	40	49	49	56	56	45	35

EL 160L E2 01 125327	
Voltage U _N	230 V 1~
Current I _{max}	0,6 A
Ambient Temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	0,0 kg

