


DATA SHEET

DVN 250 E2 20 | 126658

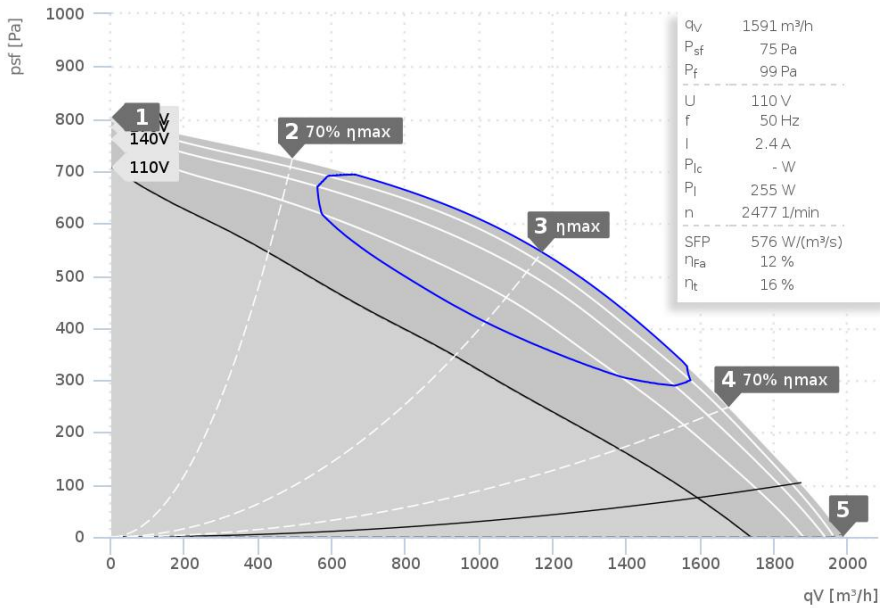

- Max. medium temperature 120°C
- Motor outside of air stream
- Swing-out fan section
- Speed controllable
- Drain tray

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	1,0	1,4	1,7	1,6	1,4
Power consumption P ₁	W	211	309	382	356	305
RPM n	1/min	2939	2908	2878	2887	2910
SPL inlet L _{WA5}	dB(A)	77	75	75	77	80
SPL outlet L _{WA6}	dB(A)	80	78	79	82	84
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	76	46	57	68	70	69	65	67	66
Outlet	L _{WA6}	79	42	60	70	74	74	71	67	65
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DVN 250 E2 20 126658	
Voltage U _N	230 V 1~
Current I _{max}	3,1 A
Ambient temperature t _A	80 °C
Medium temperatures t _M	120 °C
Speed Control	V
Motor Protection	TAO
Isolation Class	F
Weight	22,1 kg

