


# DATA SHEET

## DHA 190 E4 01 | 128515

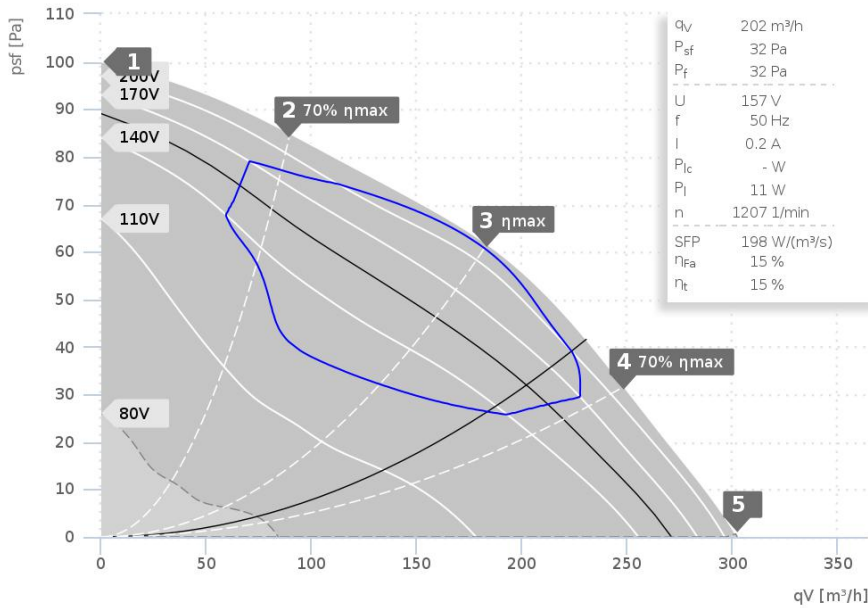

- Backward curved centrifugal fan
- Weather resistant plastic ASA, RAL 7012
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power consumption P <sub>1</sub>	W	16	17	18	18	17
RPM n	1/min	1424	1388	1365	1376	1390
SPL inlet L <sub>WA5</sub>	dB(A)	56	54	52	53	55
SPL outlet L <sub>WA6</sub>	dB(A)	59	57	56	57	59
SPL casing break out L <sub>WA2</sub>	dB(A)	-	-	-	-	-

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	49	19	32	37	42	44	45	38	27
Outlet	L <sub>WA6</sub>	53	21	33	38	45	48	49	41	31
Casing	L <sub>WA2</sub>	-	-	-	-	-	-	-	-	-

DHA 190 E4 01   128515	
Voltage U <sub>N</sub>	230 V 1~
Current I <sub>max</sub>	0,2 A
Ambient temperature t <sub>A</sub>	80 °C
Medium temperatures t <sub>M</sub>	80 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	4,5 kg

