


DATA SHEET

DHA 250 E4 02 | 129982

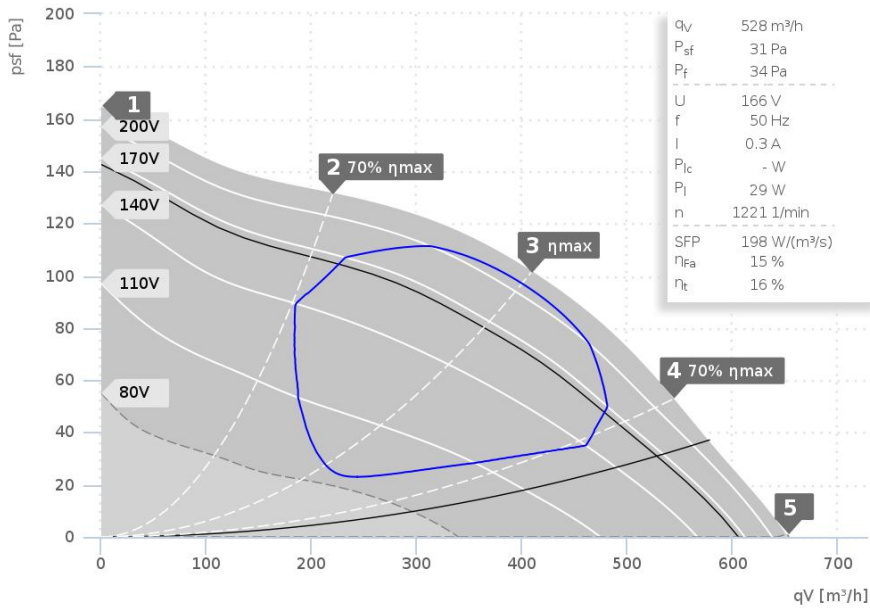

- Backward curved centrifugal fan
- Weather resistant plastic ASA, RAL 7012
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power consumption P_1	W	49	52	52	51	48
RPM n	1/min	1352	1299	1292	1318	1352
SPL inlet L_{WA5}	dB(A)	64	62	62	62	64
SPL outlet L_{WA6}	dB(A)	68	66	66	66	67
SPL casing break out L_{WA2}	dB(A)	-	-	-	-	-

Sound power (L_W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L_{WA5}	60	29	42	50	54	56	55	48	37
Outlet	L_{WA6}	64	27	43	50	56	60	60	51	40
Casing	L_{WA2}	-	-	-	-	-	-	-	-	-

DHA 250 E4 02 129982	
Voltage U_N	230 V 1~
Current I_{max}	0,3 A
Ambient temperature t_A	65 °C
Medium temperatures t_M	65 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	0,0 kg

