


DATA SHEET

DHA 280 E4 30 | 130101

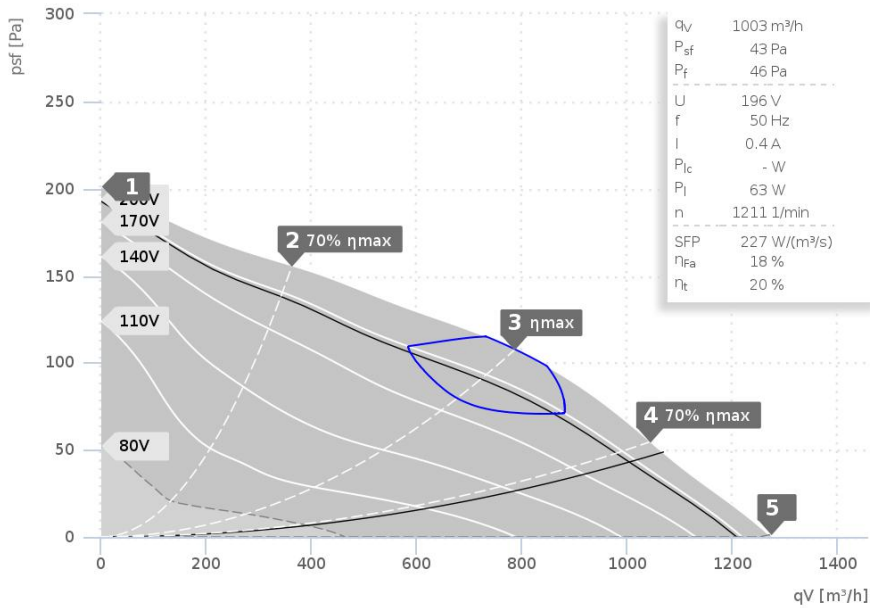

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,4	0,4	0,4	0,4	0,4
Power consumption P ₁	W	68	80	85	80	75
RPM n	1/min	1392	1274	1228	1285	1327
SPL inlet L _{WA5}	dB(A)	61	60	59	64	68
SPL outlet L _{WA6}	dB(A)	67	66	65	68	71
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	63	34	47	51	55	59	54	55	44
Outlet	L _{WA6}	67	34	48	55	60	63	60	57	46
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 280 E4 30 130101	
Voltage U _N	230 V 1~
Current I _{max}	0,4 A
Ambient temperature t _A	70 °C
Medium temperatures t _M	70 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	7,9 kg

