


DATA SHEET

DHA 250 E4 30 | 130450

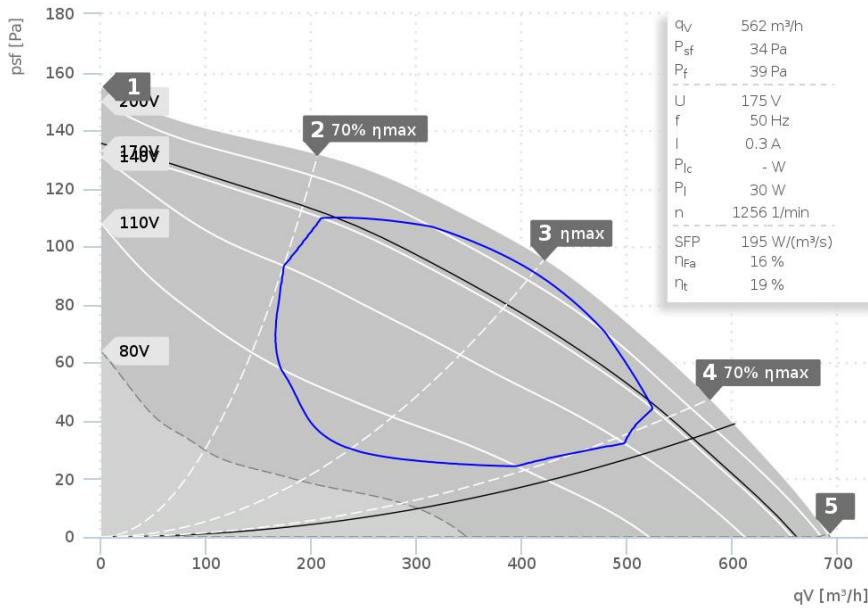

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power consumption P ₁	W	45	50	51	49	47
RPM n	1/min	1394	1322	1299	1332	1365
SPL inlet L _{WA5}	dB(A)	61	61	62	64	66
SPL outlet L _{WA6}	dB(A)	63	64	65	67	68
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	64	27	42	47	53	56	57	61	37
Outlet	L _{WA6}	66	28	46	50	56	58	61	63	40
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 250 E4 30 130450	
Voltage U _N	230 V 1~
Current I _{max}	0,3 A
Ambient temperature t _A	70 °C
Medium temperatures t _M	70 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	5,4 kg

