


# DATA SHEET

## DHA 355 E4 30 | 131089

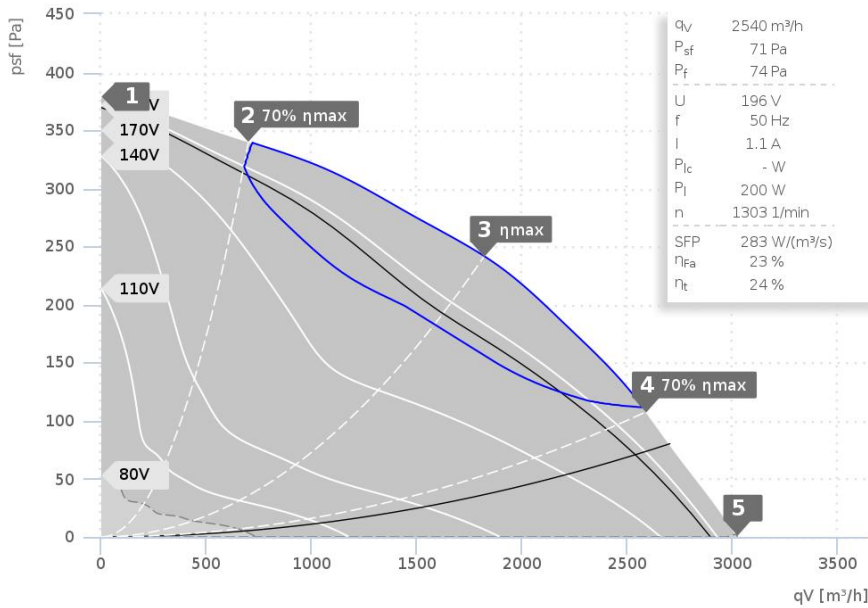

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,7	0,9	1,1	1,0	0,9
Power consumption P <sub>1</sub>	W	135	199	253	225	197
RPM n	1/min	1453	1398	1340	1375	1403
SPL inlet L <sub>WA5</sub>	dB(A)	69	68	70	74	75
SPL outlet L <sub>WA6</sub>	dB(A)	74	72	73	78	79
SPL casing break out L <sub>WA2</sub>	dB(A)	-	-	-	-	-

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	73	37	55	57	62	63	69	69	51
Outlet	L <sub>WA6</sub>	77	40	57	63	66	69	72	73	53
Casing	L <sub>WA2</sub>	-	-	-	-	-	-	-	-	-

DHA 355 E4 30   131089	
Voltage U <sub>N</sub>	230 V 1~
Current I <sub>max</sub>	1,3 A
Ambient temperature t <sub>A</sub>	40 °C
Medium temperatures t <sub>M</sub>	40 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	16,5 kg

