


DATA SHEET

DHA 400 E4 30 | 131092

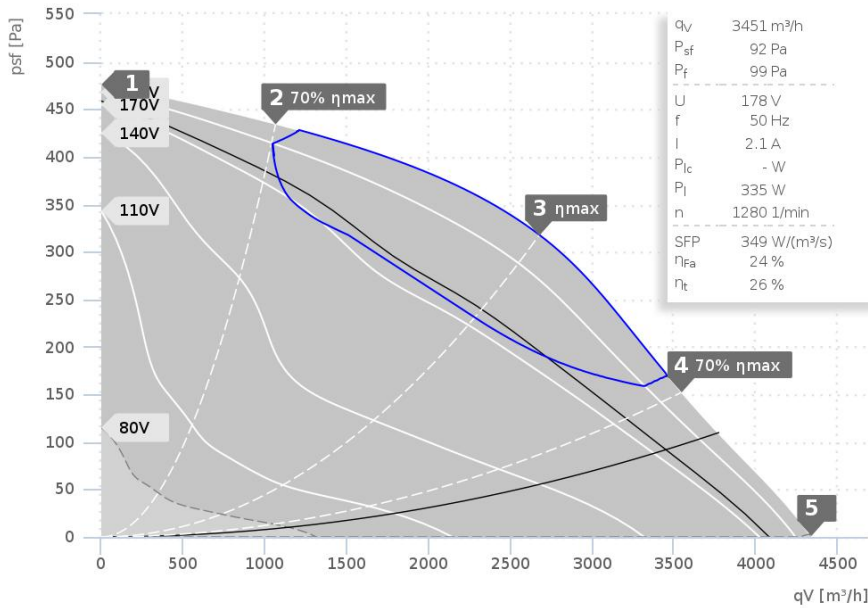

- Backward curved centrifugal fan
- Housing made of aluminium AlMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	1,5	1,9	2,3	2,1	1,9
Power consumption P ₁	W	235	363	456	409	366
RPM n	1/min	1451	1399	1359	1382	1402
SPL inlet L _{WA5}	dB(A)	72	68	70	74	77
SPL outlet L _{WA6}	dB(A)	78	74	75	78	81
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	73	45	59	62	66	64	63	69	56
Outlet	L _{WA6}	77	44	61	67	71	71	67	71	58
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 400 E4 30 131092	
Voltage U _N	230 V 1~
Current I _{max}	2,7 A
Ambient temperature t _A	65 °C
Medium temperatures t _M	65 °C
Speed Control	V
Motor Protection	TAE
Isolation Class	F
Weight	19,5 kg

