


DATA SHEET

DHA 220 E2 30 | 131826

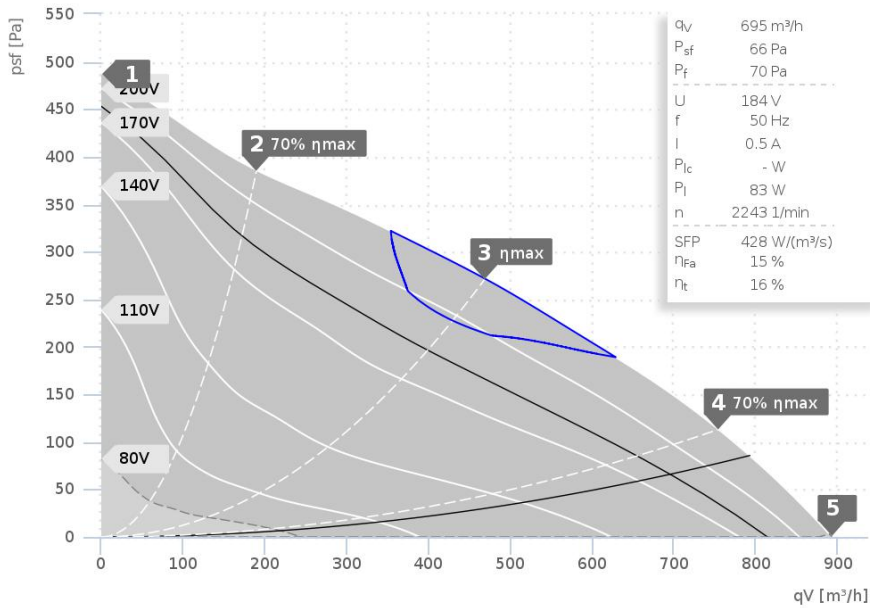

- Backward curved centrifugal fan
- Housing made of aluminium AlMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,4	0,5	0,5	0,5	0,5
Power consumption P ₁	W	78	96	112	105	96
RPM n	1/min	2761	2576	2435	2521	2598
SPL inlet L _{WA5}	dB(A)	65	66	67	69	72
SPL outlet L _{WA6}	dB(A)	70	71	71	74	76
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	67	30	43	54	60	60	60	60	60
Outlet	L _{WA6}	71	32	44	56	63	65	66	64	60
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 220 E2 30 131826	
Voltage U _N	230 V 1~
Current I _{max}	0,6 A
Ambient temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	4,9 kg

