


# DATA SHEET

## DHA 315 E4 30 | 131852

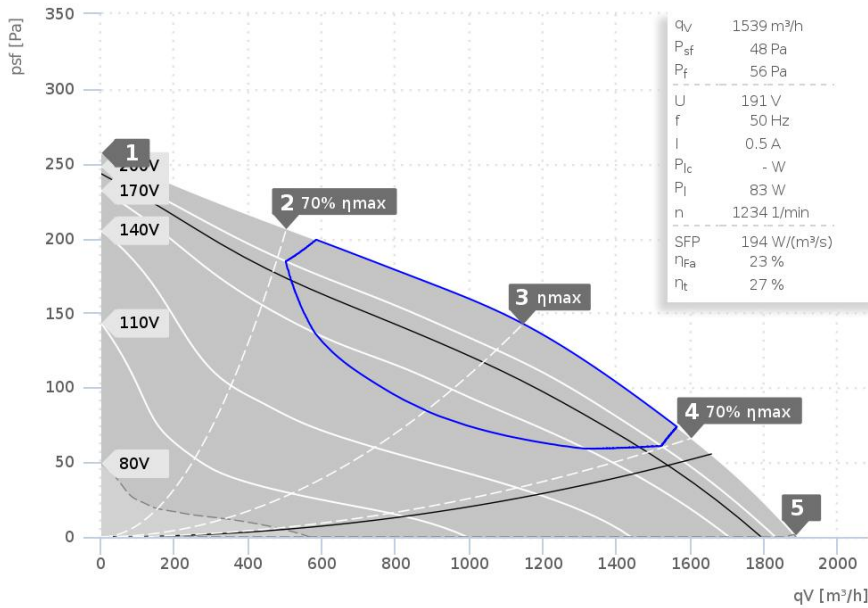

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,4	0,5	0,5	0,5	0,5
Power consumption P <sub>1</sub>	W	80	106	115	105	98
RPM n	1/min	1400	1301	1268	1313	1340
SPL inlet L <sub>WA5</sub>	dB(A)	65	64	61	64	68
SPL outlet L <sub>WA6</sub>	dB(A)	69	68	65	68	71
SPL casing break out L <sub>WA2</sub>	dB(A)	-	-	-	-	-

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	64	29	52	51	56	54	55	60	49
Outlet	L <sub>WA6</sub>	67	33	53	54	60	60	60	62	50
Casing	L <sub>WA2</sub>	-	-	-	-	-	-	-	-	-

DHA 315 E4 30   131852	
Voltage U <sub>N</sub>	230 V 1~
Current I <sub>max</sub>	0,6 A
Ambient temperature t <sub>A</sub>	80 °C
Medium temperatures t <sub>M</sub>	80 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	7,8 kg

