


DATA SHEET

DHA 190 E2 40 | 134993

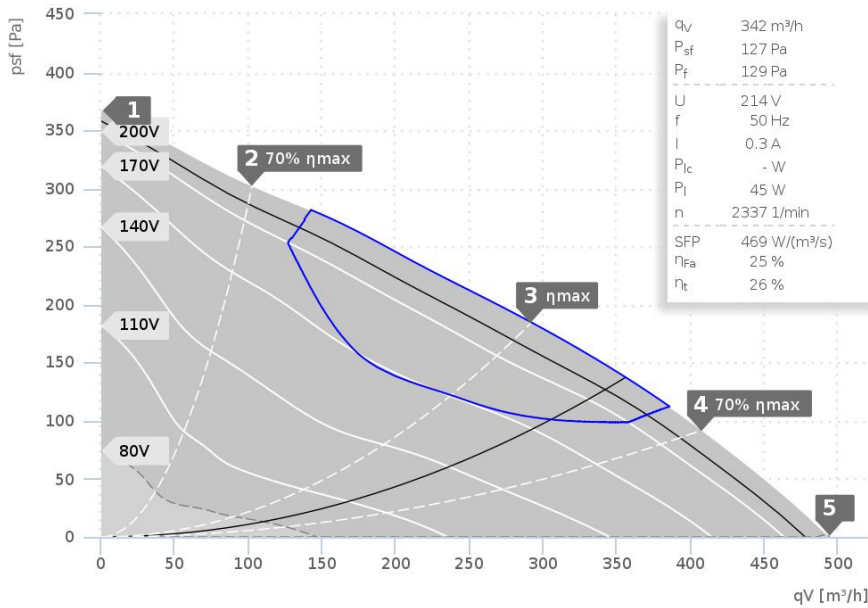

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,2	0,3	0,3	0,3	0,3
Power consumption P ₁	W	36	43	50	48	45
RPM n	1/min	2721	2553	2406	2453	2510
SPL inlet L _{WA5}	dB(A)	68	66	63	68	70
SPL outlet L _{WA6}	dB(A)	70	69	66	71	73
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	64	33	43	52	56	59	59	57	48
Outlet	L _{WA6}	67	31	44	54	60	62	63	59	49
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 190 E2 40 134993	
Voltage U _N	230 V 1~
Current I _{max}	0,3 A
Ambient temperature t _A	70 °C
Medium temperatures t _M	70 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	4,7 kg

