


DATA SHEET

ruck.eu
VENTILATOREN

DVA 225 E2 30 | 137244

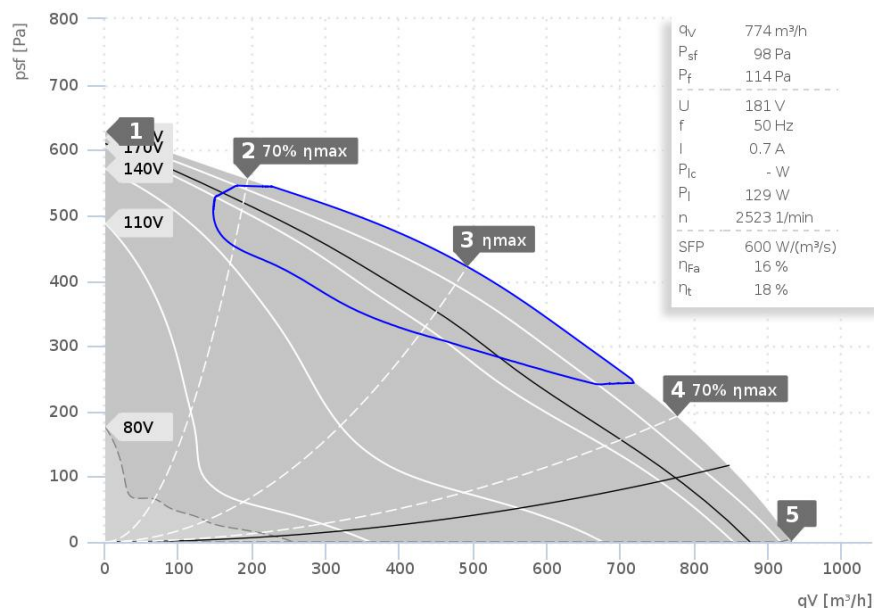

— ErP compliant range



- Backward curved centrifugal fan
- Housing made of aluminium AlMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

Operating Point		1	2	3	4	5
Current I	A	0,4	0,5	0,7	0,7	0,6
Power consumption P_1	W	84	111	146	150	138
RPM n	1/min	2910	2840	2746	2739	2775
SPL inlet L_{WA5}	dB(A)	72	71	70	72	75
SPL outlet L_{WA6}	dB(A)	74	74	73	75	78
SPL casing break out L_{WA2}	dB(A)	-	-	-	-	-

Sound power (L_W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L_{WA5}	72	41	56	61	65	67	62	63	63
Outlet	L_{WA6}	74	41	56	64	68	68	67	64	61
Casing	L_{WA2}	-	-	-	-	-	-	-	-	-

DVA 225 E2 30 137244	
Voltage U_N	230 V 1~
Current I_{max}	0,9 A
Ambient temperature t_A	60 °C
Medium temperatures t_M	60 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	5,7 kg

