


DATA SHEET

DHA 225 E2 30 | 137246

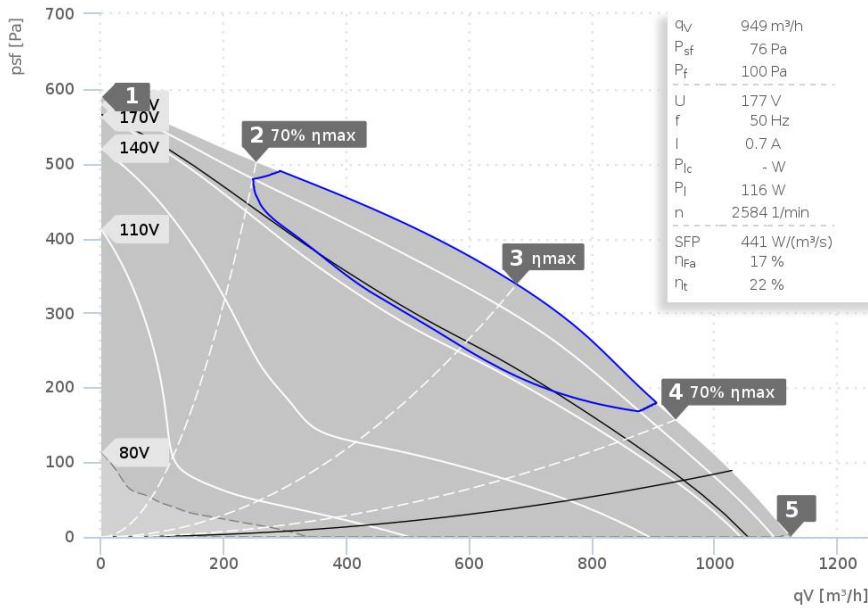

- Backward curved centrifugal fan
- Housing made of aluminium AIMg3
- Speed controllable
- Integrated thermostatic switch
- Maintenance-free ball bearings

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,4	0,6	0,7	0,6	0,6
Power consumption P ₁	W	90	125	155	141	125
RPM n	1/min	2894	2800	2725	2770	2809
SPL inlet L _{WA5}	dB(A)	74	74	72	76	79
SPL outlet L _{WA6}	dB(A)	78	78	76	79	82
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	75	43	57	64	68	69	66	67	68
Outlet	L _{WA6}	79	41	57	67	72	73	72	70	68
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DHA 225 E2 30 137246	
Voltage U _N	230 V 1~
Current I _{max}	0,9 A
Ambient temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	5,7 kg

