


DATA SHEET

EM 125 E2 01 | 137550

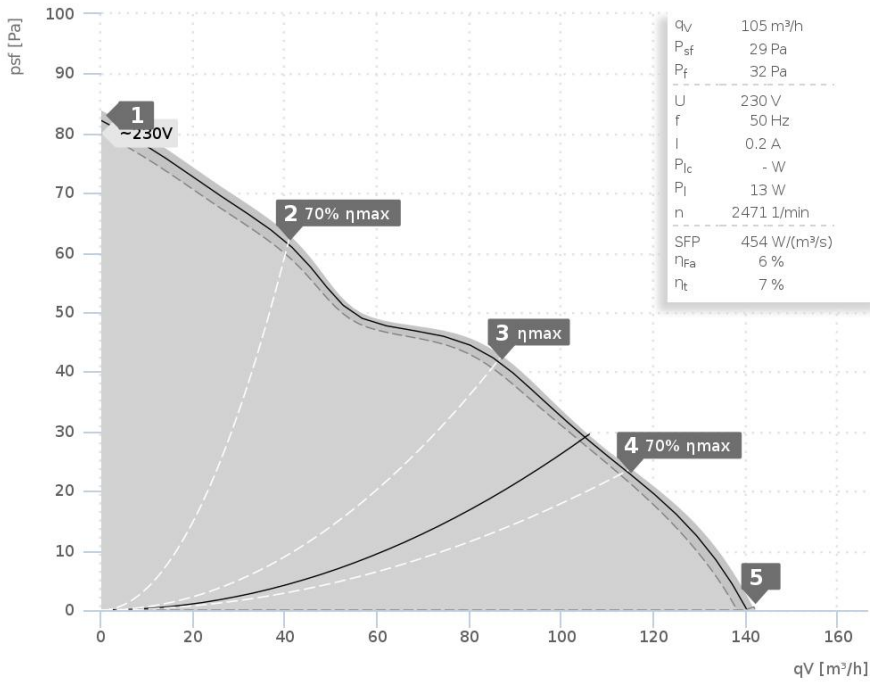

- Diagonal impeller with stator
- With Plastic housing
- Integrated thermostatic switch

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power consumption P ₁	W	13	13	13	14	14
RPM n	1/min	2485	2532	2498	2458	2484
SPL inlet L _{WA5}	dB(A)	52	53	49	51	51
SPL outlet L _{WA6}	dB(A)	53	54	52	52	53
SPL casing break out L _{WA2}	dB(A)	49	48	50	50	49

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	51	37	39	39	44	45	44	41	29
Outlet	L _{WA6}	52	38	30	35	44	44	47	44	27
Casing	L _{WA2}	50	30	31	34	50	35	32	23	13

EM 125 E2 01 137550	
Voltage U _N	230 V 1~
Current I _{max}	0,2 A
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	
Motor Protection	TAI
Isolation Class	F
Weight	0,7 kg

