


DATA SHEET

EM 160 E2 01 | 137612

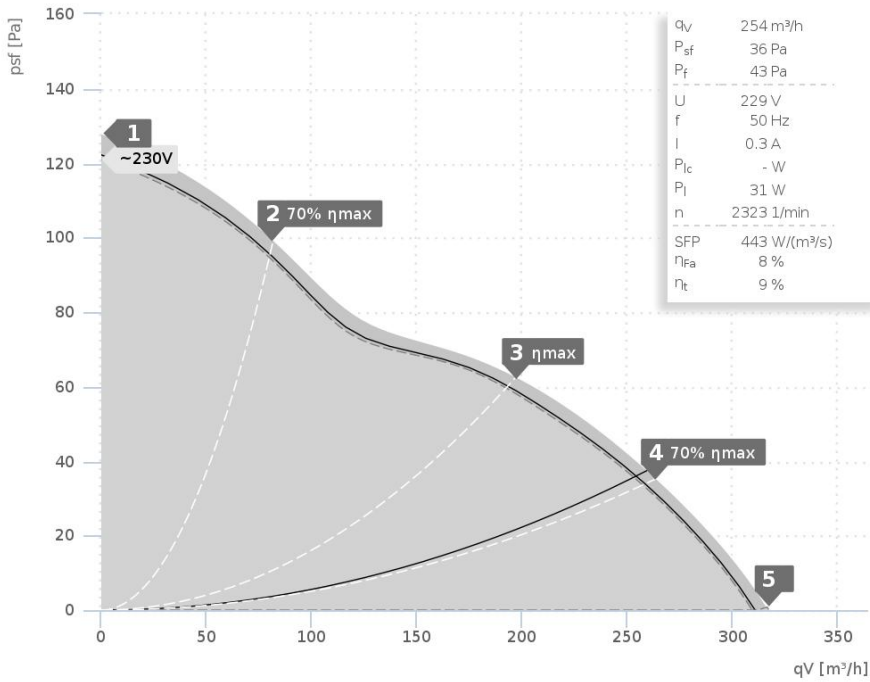

- Diagonal impeller with stator
- With Plastic housing
- Integrated thermostatic switch

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power consumption P ₁	W	29	28	30	31	30
RPM n	1/min	2389	2432	2364	2329	2385
SPL inlet L _{WA5}	dB(A)	56	56	56	54	56
SPL outlet L _{WA6}	dB(A)	61	60	60	59	61
SPL casing break out L _{WA2}	dB(A)	51	50	50	49	51

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	54	23	33	42	45	48	49	47	37
Outlet	L _{WA6}	58	29	37	45	49	53	54	50	36
Casing	L _{WA2}	48	31	34	43	45	32	32	28	17

EM 160 E2 01 137612	
Voltage U _N	230 V 1~
Current I _{max}	0,3 A
Ambient Temperature t _A	40 °C
Medium temperatures t _M	40 °C
Speed Control	
Motor Protection	TAI
Isolation Class	F
Weight	1,0 kg

