


DATA SHEET

EM 125L E2 01 | 137670

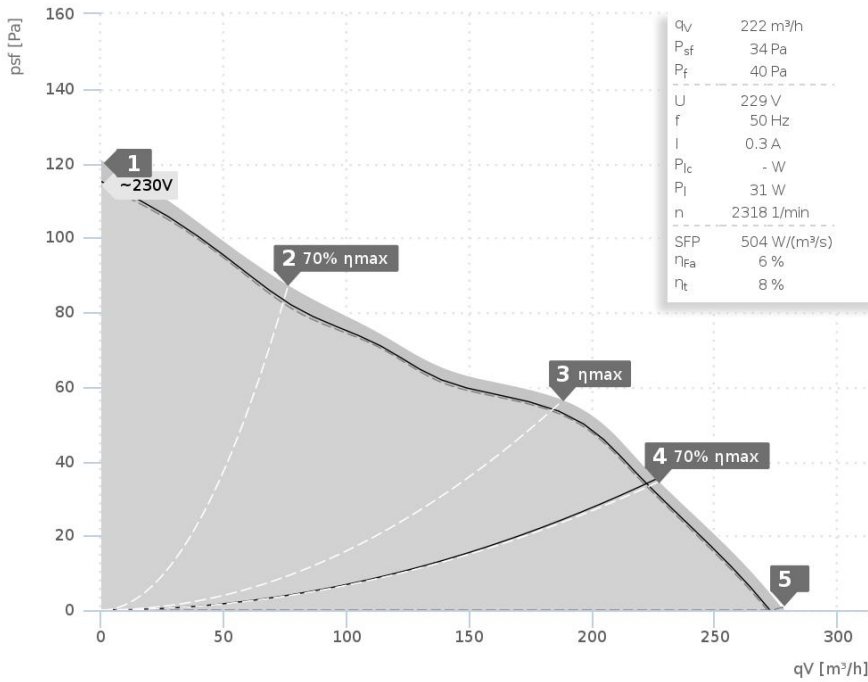

- Diagonal impeller with stator
- With Plastic housing
- Integrated thermostatic switch

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power consumption P _l	W	28	27	30	31	31
RPM n	1/min	2431	2494	2349	2317	2339
SPL inlet L _{WA5}	dB(A)	57	56	58	58	58
SPL outlet L _{WA6}	dB(A)	58	56	58	58	60
SPL casing break out L _{WA2}	dB(A)	45	45	44	45	46

EM 125L E2 01 137670	
Voltage U _N	230 V 1~
Current I _{max}	0,3 A
Ambient Temperature t _A	40 °C
Medium temperatures t _M	40 °C
Speed Control	
Motor Protection	TAI
Isolation Class	F
Weight	1,2 kg

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	57	27	34	42	53	53	51	43	32
Outlet	L _{WA6}	57	27	38	47	52	53	51	46	33
Casing	L _{WA2}	44	29	22	35	41	34	36	29	15

