


DATA SHEET

DVN 400 E4 21 | 138009

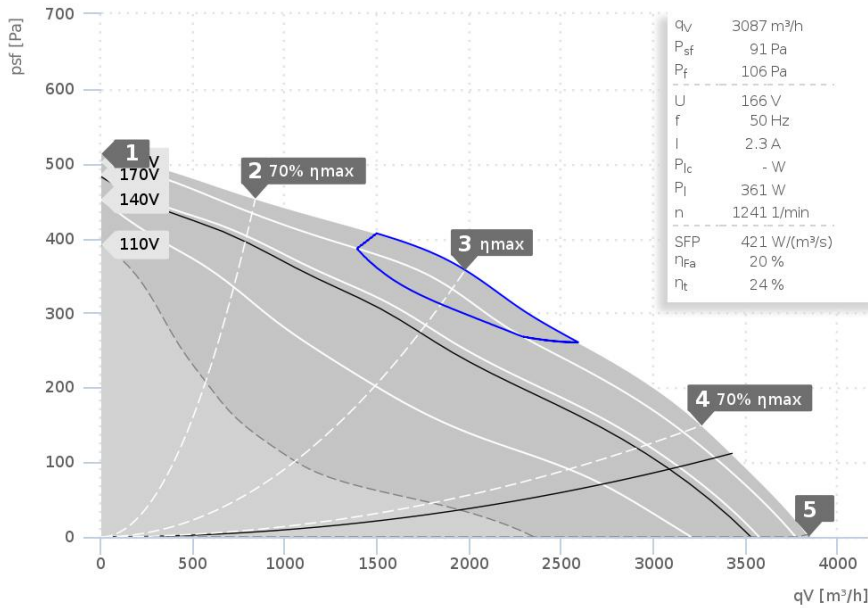

- Max. medium temperature 120°C
- Motor outside of air stream
- Swing-out fan section
- Speed controllable
- Drain tray

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	1,3	1,7	2,1	2,1	1,8
Power consumption P ₁	W	248	360	460	447	389
RPM n	1/min	1447	1407	1366	1376	1398
SPL inlet L _{WA5}	dB(A)	73	72	68	73	75
SPL outlet L _{WA6}	dB(A)	77	76	73	77	80
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	71	53	61	63	66	62	61	56	59
Outlet	L _{WA6}	75	45	64	68	70	69	63	56	57
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

DVN 400 E4 21 138009	
Voltage U _N	230 V 1~
Current I _{max}	2,8 A
Ambient temperature t _A	60 °C
Medium temperatures t _M	120 °C
Speed Control	V
Motor Protection	TAO
Isolation Class	F
Weight	39,2 kg

