


DATA SHEET

ruck.eu
VENTILATOREN

EL 400 EC 10 | 139773

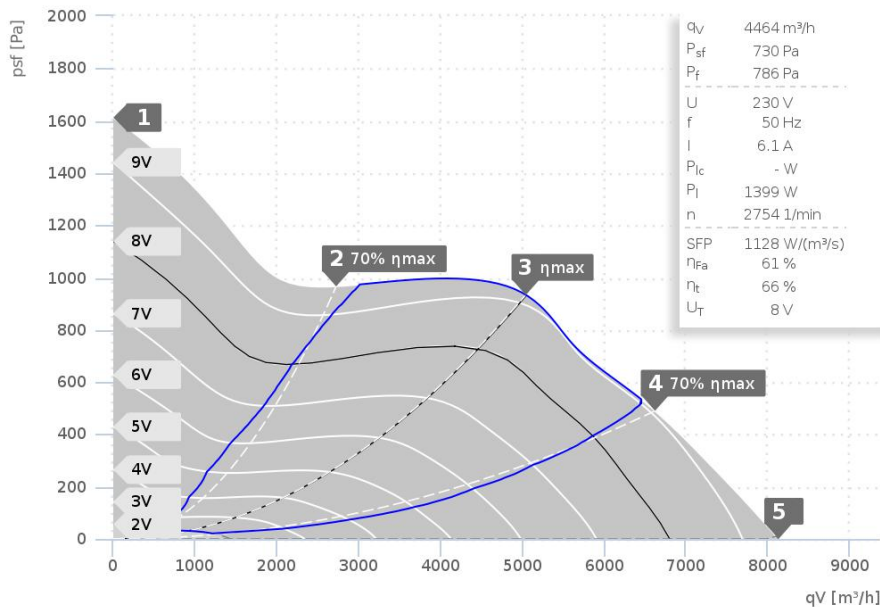

- Diagonal impeller with stator
- Casing of aluminium
- EC motor
- Necessary EC-Controller included in delivery

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	8,7	7,2	8,8	8,7	9,1
Power consumption P _i	W	2004	1647	2034	1995	2104
RPM n	1/min	3294	3332	3089	3108	3297
SPL inlet L _{WA5}	dB(A)	98	97	87	90	96
SPL outlet L _{WA6}	dB(A)	103	101	92	95	100
SPL casing break out L _{WA2}	dB(A)	92	91	81	83	90

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	86	49	59	74	78	80	81	77	67
Outlet	L _{WA6}	91	50	61	76	87	86	83	79	70
Casing	L _{WA2}	81	51	48	59	77	77	71	68	57

EL 400 EC 10 139773	
Voltage U _N	230 V 1~
Current I _{max}	9,6 A
Ambient Temperature t _A	50 °C
Medium temperatures t _M	80 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	17,9 kg

