


DATA SHEET

RS 125L 20 | 143353

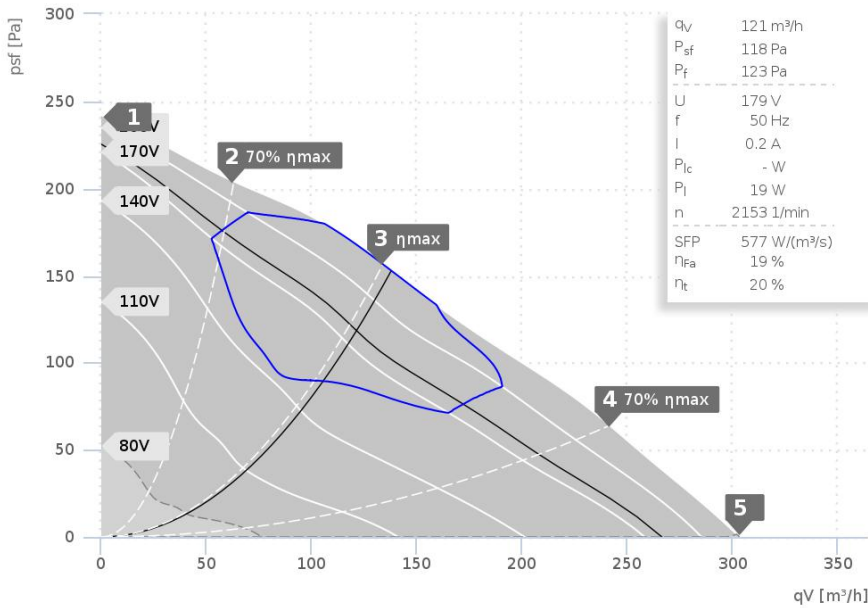

- Backward curved centrifugal fan
- Metal housing RAL 7035
- Speed controllable
- Integrated thermostatic switch
- Incl. terminal box

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power consumption P ₁	W	22	25	27	28	26
RPM n	1/min	2726	2594	2448	2415	2485
SPL inlet L _{WA5}	dB(A)	58	58	57	59	61
SPL outlet L _{WA6}	dB(A)	59	59	59	61	61
SPL casing break out L _{WA2}	dB(A)	46	45	45	44	45

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	54	32	37	44	48	49	47	39	29
Outlet	L _{WA6}	55	34	39	52	46	47	47	41	29
Casing	L _{WA2}	41	27	30	30	32	38	32	26	16

RS 125L 20 143353	
Voltage U _N	230 V 1~
Current I _{max}	0,2 A
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	2,7 kg

