


DATA SHEET

EL 560 D4 02 | 146537

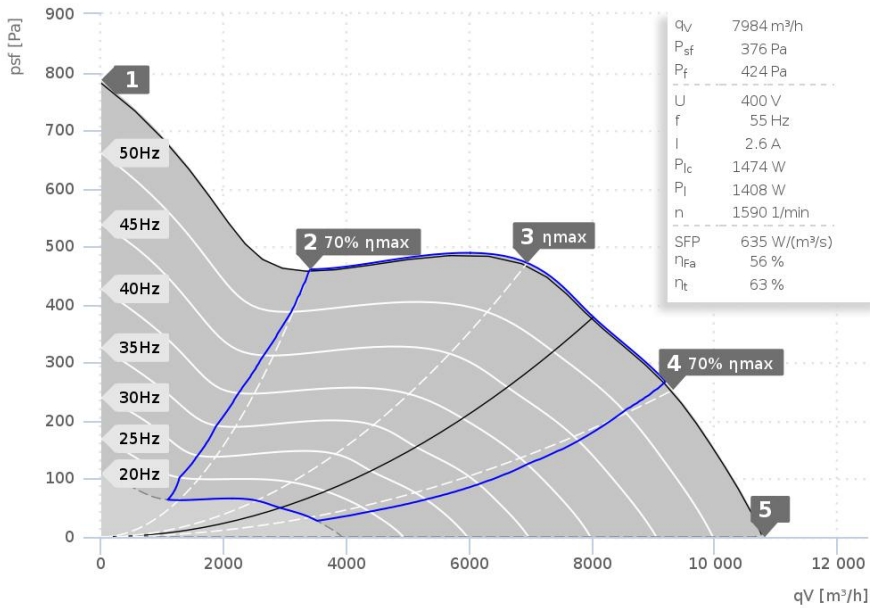

- Diagonal impeller with stator
- Casing of aluminium
- Integrated thermostatic switch
- Single step mains operation possible 400V/50Hz

— ErP compliant range

Operating Point		1	2	3	4	5
Current I	A	2,4	2,0	2,6	2,6	2,4
Power consumption P ₁	W	1288	977	1414	1448	1318
RPM n	1/min	1597	1612	1595	1595	1601
SPL inlet L _{WA5}	dB(A)	91	87	85	86	88
SPL outlet L _{WA6}	dB(A)	94	90	86	86	90
SPL casing break out L _{WA2}	dB(A)	84	81	78	77	81

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	84	42	65	74	79	79	77	72	63
Outlet	L _{WA6}	86	46	68	76	82	80	77	73	64
Casing	L _{WA2}	76	42	60	68	73	70	67	64	53

EL 560 D4 02 146537	
Voltage U _N	400 V 3~
Current I _{max}	2,7 A
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	f
Motor Protection	TAO
Isolation Class	F
Weight	33,0 kg

