


EC Slimline CO-NOx | 148882

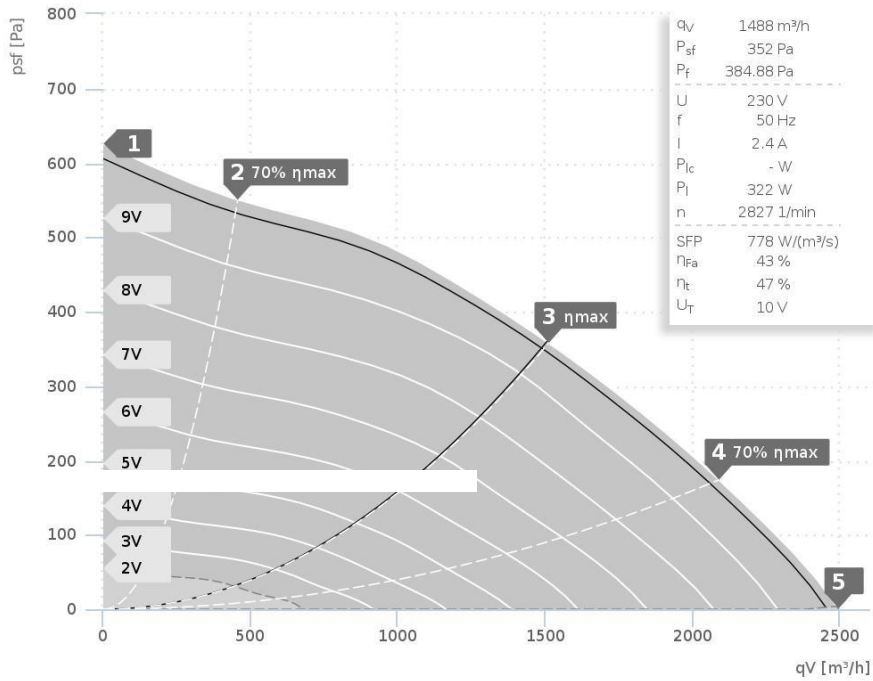

- The markets lowest impulse fan
- 11 cm building height
- Integrated 3 speed control
- Integrated safety switch

Operating Point						
Current I	A	1,2	1,7	2,5	2,3	2,0
Power consumption P ₁	W	152	225	334	316	270
RPM n	1/min	2925	2927	2866	2906	2914
SPL inlet L _{WA5}	dB(A)	82	82	79	79	81
SPL outlet L _{WA6}	dB(A)	84	82	78	77	79
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	79	38	50	69	71	74	74	70	62
Outlet	L _{WA6}	78	44	52	67	69	72	74	69	60
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

EC Slimline CO-NOx 148882	
Voltage U _N	230 V 1~
Current I _{max}	2,6 A
Ambient temperature t _A	40 °C
Medium temperatures t _M	40 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	21,2 kg

